



GLS40




LE40GW



LE40 is a combination of elegant appearance and structure design, innovative light and heat design, new material and new technology and intelligent control technology. A professional lamp can be widely used in the main lighting of indoor space.

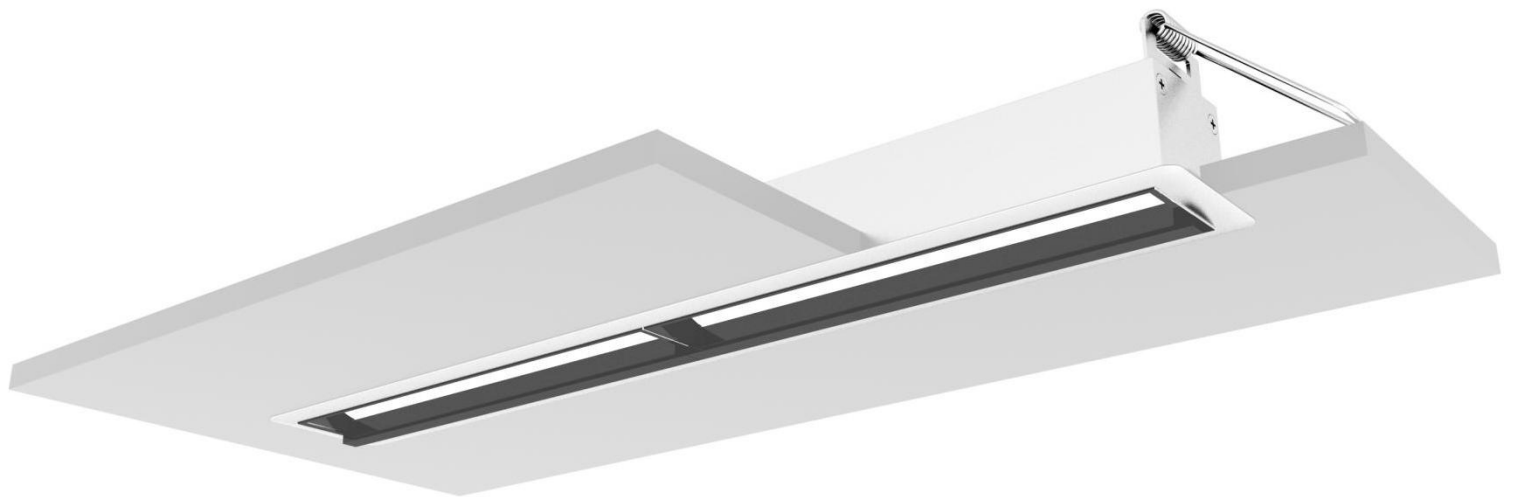

- AL6063-T5 aluminum profile with high-quality surface treatment;
- LM80 certified light source, life > 50000h;
- Built-in efficient and safe flicker-free dimming power supply, Support 0-10V dimming or Dali dimming;
- Wall Wash lighting, high quality facade lighting effect;

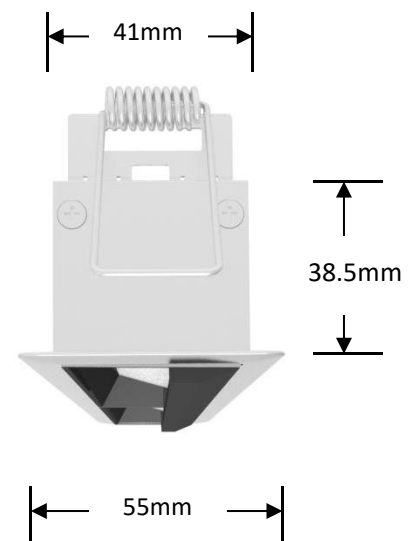

Optical & electronic data:


Model	Size	CCT	Flux (lm)	CRI	Beam angle	Input voltage	Dimming	PF	Power (w)	Efficiency (lm/w)
GLS-LE40GWXWS200-T10NW8B-DC	210mm	3000K	475lm	>80	100°	200~240VAC 50Hz/60Hz	0-10V	>0.9	10W	48
		3500K	475lm		x70°					48
		4000K	500lm		x20°					50
GLS-LE40GWXWS400-T18NW8B-DC	400mm	3000K	950lm	>80	100°	200~240VAC 50Hz/60Hz	0-10V	>0.9	18W	53
		3500K	950lm		x70°					53
		4000K	1000lm		x20°					56
GLS-LE40GWXWS1200-T36NW8B-DC	1160mm	3000K	2110lm	>80	100°	200~240VAC 50Hz/60Hz	0-10V	>0.9	36W	59
		3500K	2160lm		x70°					60
		4000K	2200lm		x20°					62
GLS-LE40GWXWS1500-T45XX8B-DC	1445mm	3000K	2640lm	>80	100°	200~240VAC 50Hz/60Hz	0-10V	>0.9	45W	59
		3500K	2700lm		x70°					60
		4000K	2750lm		x20°					62
GLS-LE40GWXWS1800-T54NW8B-DC	1730mm	3000K	3170lm	>80	100°	200~240VAC 50Hz/60Hz	0-10V	>0.9	54W	59
		3500K	3240lm		x70°					60
		4000K	3300lm		x20°					62
GLS-LE40GWXWS2300-T72NW8B-DC	2300mm	3000K	4230lm	>80	100°	200~240VAC 50Hz/60Hz	0-10V	>0.9	72W	59
		3500K	4310lm		x70°					60
		4000K	4400lm		x20°					62

Remark:


- 1、 the output data is based on the testing result of 405mm luminaires ;
- 2、 the tolerance of output data can be vary up to 10%;
- 3、 the output data is typical value;

◆luminaire with Wall Wash (GLS-LE40GW)

AAI Figure

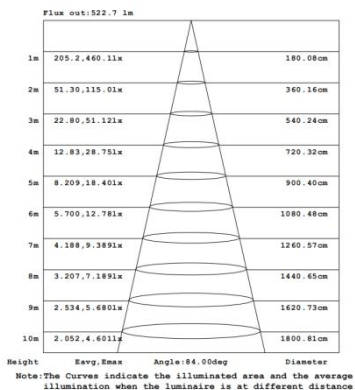

Luminous intensity distribution diagram

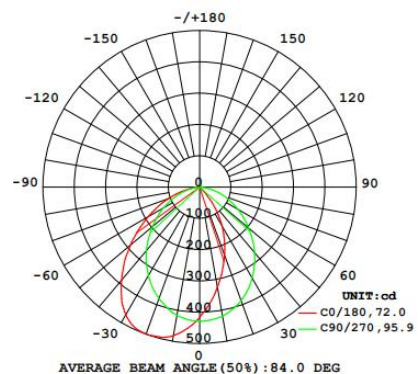

Packing:

◆The whole package


1.Tightly wrap and fix the magnetic endcaps and profiles with winding film (in order to prevent the plastic endcaps move and damaged by extrusion of profile), then put PE tube on the product.



2.The back of the product is placed on a 15 mm thick EPE FOAM, and with 22 mm thick EPE FOAMs at both ends, then stick EPE FOAM on the side, bundled with wrapping film;



3.Put the back of the product facing down on the W9K paper envelope with 3 mm thickness, and fold the paper envelope to wrap the product.




4.After the product is wrapped, the edge is sealed with adhesive paper and the product information labels are affixed.




5.Put the white boxes packed with products in bundles according to the standard quantity and requirement. Add K = K paper sheath at both ends, then bundle them with wrapping film at both ends.



6.Pack the bundled products on K = K cardboard after indentation cutting.



7.Sealing box with plastic corner guard, wrapping with film, then wrapping with packaging tape.



8.Labeling (SEL Label, Quantity, Net Weight, Gross Weight Labels, Box Seal)



Model	Type	Demension (individual package)	Pcs /bundle	NW (Kg)	GW (Kg)	Demension (whole package)	CBM (m ³)
GLS-LE40GWXWS200-T10XX8B-DC	Individual Packing	255*85*95mm	6	2.4	4.2	275*300*215mm	0.02
GLS-LE40GWXWS400-T18XX8B-DC		445*85*95mm	6	5.1	8.2	465*300*215mm	0.03
GLS-LE40GWXWS1200-T36XX8B-DC		1240*116*105mm	6	14.4	19.1	1260*272*235mm	0.08
GLS-LE40GWXWS1500-T45XX8B-DC		1540*116*105mm	6	18	23.9	1560*272*235mm	0.1
GLS-LE40GWXWS1800-T54XX8B-DC		1840*116*105mm	6	21.6	28.7	1860*272*235mm	0.12
GLS-LE40GWXWS2300-T72XX8B-DC		2440*116*105mm	6	28.8	38.3	2460*272*235mm	0.16

◆ Description about label information

GLS-LE40		sel LIGHTING	
Luminous flux: 3500 LM	Type: Luminaire	Part NO.: GLS-LE40FDXWS1200-T38NW8B-DC	
Power(Typ): 38W	SO: YO17050147	NO.: ZWL170510-0380	
CCT: 4 000K	Color: White	Power factor: >0.95	
CRI: >80	Cover type: Diffuser	Size: 41x38.5x1146mm	
Input voltage: 200~240VAC	Date: 20200601		
Frequency: 50/60HZ			

Ordering code:

Category	Installation	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-Light Source Type	Type Power of Luminaire	CCT	CRI	Power Type	Package	Label Type	
GLS40	Recessed	40 Series	Grating	Wall Wash	No	White	Standard End Cap	210mm	-Constant Current Rigid	10W	3000K	CRI>80	0-10V	Individual Packing	SEL	
GLS	LE	40	G	W	X	W	S	200	-T	10	80	80	DALI	-D	Customized	
						Black		400		18						3500K
						B		1160mm		36						PW
						Silver		1445m		54						4000K
						S		1500		72						NW
								1730mm								
								1800								
								2300mm								
								2300								
						GLS		-LE		40						G

Attentions:

- ◆ Please install the product in the right environment as much as possible;
- ◆ Please be careful during operation. Do not touch the AC power supply in case of electric shock;
- ◆ Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit;
- ◆ This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.